


FILTERNOX SFH MODELS TECHNICAL SPECIFICATIONS

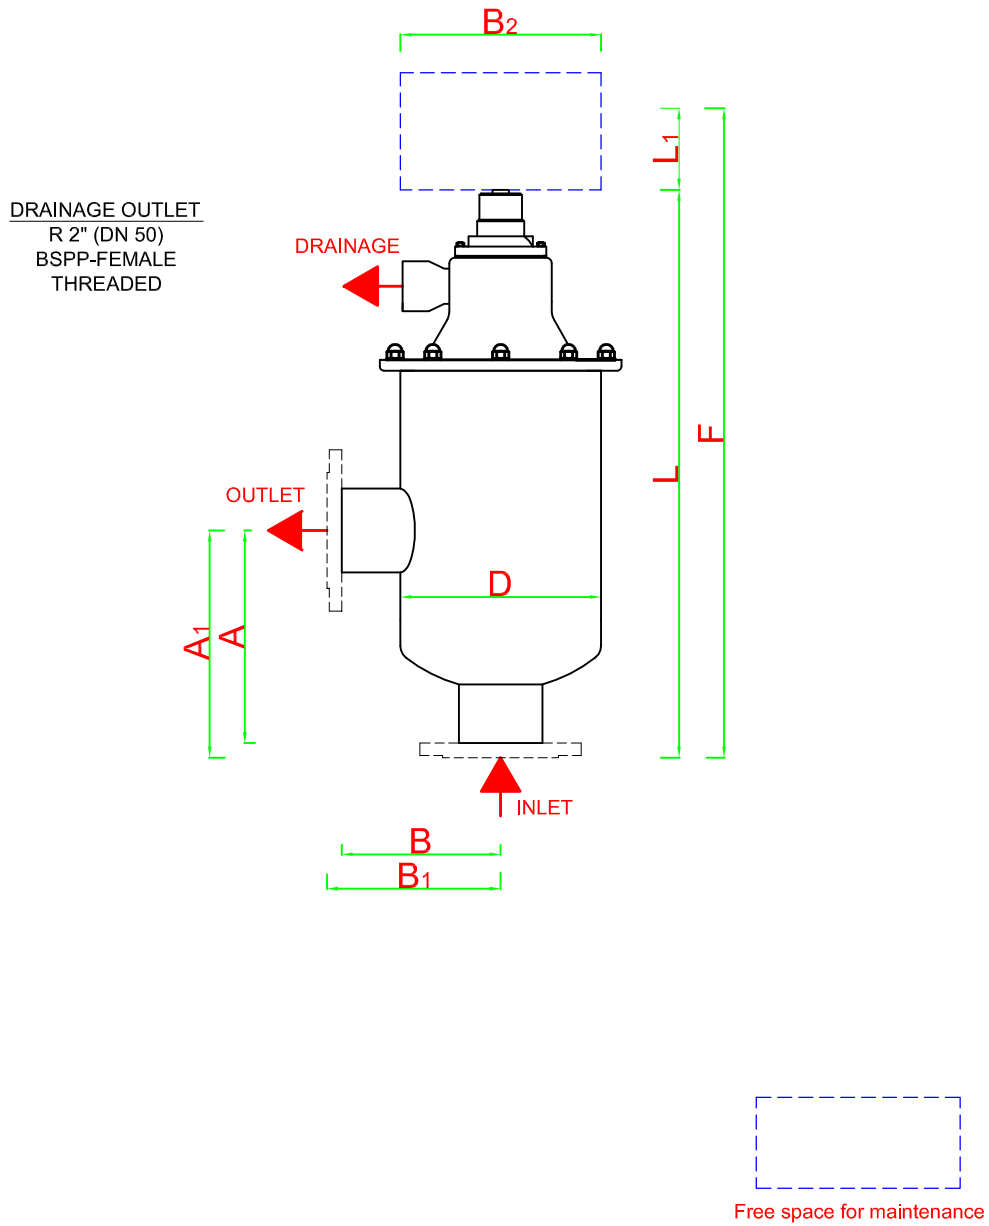

FILTER MODELS	CONNECTION	INLET/OUTLET		A	A1	B	B1	B2	L	L1	F	D	WEIGHT (kg)		MAX. FLOW RATE m³/h	SCREEN AREA cm²
		inch	DN										FULL	EMPTY		
SFH 110102	THREADED	2"	50	265	--	190	--	370	730	260	990	10"	55	30	25	1200
SFH 110103	THREADED	3"	80	280	--	205	--	370	745	260	1005	10"	55	30	40	1200
SFH 110104	FLANGED	4"	100	--	310	--	235	370	775	260	1035	10"	60	35	80	1200
SFH 110202	THREADED	2"	50	365	--	190	--	370	930	260	1190	10"	65	35	25	2400
SFH 110203	FLANGED	3"	80	380	--	205	--	370	945	260	1205	10"	65	35	40	2400
SFH 110204	FLANGED	4"	100	--	410	--	235	370	975	260	1235	10"	70	40	80	2400
SFH 110206	FLANGED	6"	150	--	460	--	285	370	1025	260	1285	10"	80	50	120	2400

All dimensions are in millimeters.

Antel-Filternox reserves the rights to modify any of the technical information in this document without prior notification.  
All the rights for this drawing are belonging to ANTEL TREATMENT SYSTEM CONS.IND&COM.CO.INC.It can not be copied or given to the persons without permission.