


FILTERNOX SPT MODELS TECHNICAL SPECIFICATIONS

DRAINAGE OUTLET
R 2" (DN 50)
BSPP-FEMALE
THREADED

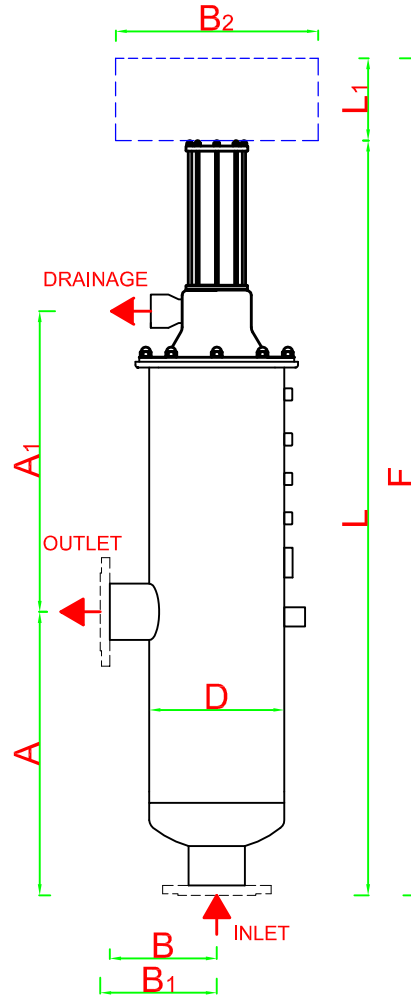

Free space for maintenance

FILTER MODELS	CONNECTION	INLET/OUTLET		A	A1	B	B1	B2	L	L1	F	D	WEIGHT (kg)		MAX. FLOW RATE m ³ /h	SCREEN AREA cm ²
		inch	DN										FULL	EMPTY		
SPT 110303	THREADED	3"	80	575	598	205	--	370	1500	500	2000	10"	75	45	40	3600
SPT 110304	FLANGED	4"	100	605	598	--	235	370	1530	500	2030	10"	83	53	80	3600
SPT 110306	FLANGED	6"	150	655	598	--	285	370	1580	500	2080	10"	87	57	120	3600
SPT 110308	FLANGED	8"	200	655	598	--	285	370	1580	500	2080	10"	93	63	200	3600
SPT 110403	THREADED	3"	80	675	698	205	--	370	1700	500	2200	10"	82	52	40	4800
SPT 110404	FLANGED	4"	100	705	698	--	235	370	1730	500	2230	10"	90	60	80	4800
SPT 110406	FLANGED	6"	150	755	698	--	285	370	1780	500	2280	10"	94	64	120	4800
SPT 110408	FLANGED	8"	200	755	698	--	285	370	1780	500	2280	10"	110	80	200	4800

All dimensions are in millimeters.

Antel-Filternox reserves the rights to modify any of the technical information in this document without prior notification.
All the rights for this drawing are belonging to ANTEL TREATMENT SYSTEM CONS.IND&COM.CO.INC.It can not be copied or given to the persons without permission.